



# SOFTCOOKER S - SR

*cottura a bassa temperatura  
low temperature cooking*

- Apparecchio per la cottura a bassa temperatura con riscaldamento statico dell'acqua.
- Struttura in acciaio inox, vasca di cottura gastronorm in acciaio inox.
- Pratiche maniglie per il trasporto della vasca.
- Potenti resistenze corazzate a contatto del fondo della vasca.
- Sistema elettronico di controllo della temperatura con visualizzazione della temperatura e del tempo di esercizio.
- Stesso sistema di controllo del Softcooker con  $\Delta T$  di 0,2°C.
- 5 programmi memorizzabili.
- Temperatura selezionabile in °C e °F.
- Coperchio vasca fornito di serie.
- Versione R con rubinetto per lo scarico dell'acqua.

- Low temperature cooking device with water static heating.
- Stainless steel structure and 1/1 GN made of stainless steel
- Practical handles to carry it easily
- Powerful shock-proof coated heating elements in contact with tank bottom
- Electronic control system of the temperature with working temperature display
- Same control system of Softcooker with  $\Delta T$  of 0,2°C.
- 5 storables programs
- Temperature setting in °C and °F.
- Equipped with lid
- R version with tap for discharging water.



**SOFTCOOKER S 1/1 GN**

1.coperchio standard  
standard lid



**SOFTCOOKER S 2/3 GN**

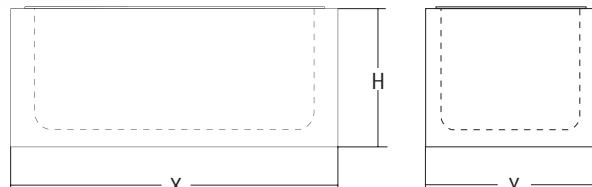
2.coperchio standard  
standard lid



**SOFTCOOKER S 2/3 GN**



**SOFTCOOKER S 1/1 GN**

**SOFTCOOKER SR 1/1 GN**4.coperchio standard  
standard lid**SOFTCOOKER SR 2/3 GN**3.coperchio standard  
standard lid

	watt	°C	lt	lt	mm	mm	mm	kg	mm	kg
<b>Softcooker S - 2/3 GN</b>	1150	230V/50Hz	24 + 99	16,5	14	390	360	300	5	600x500x420
<b>Softcooker SR - 2/3 GN</b>	1150	230V/50Hz	24 + 99	19	17	400	370	300	5,5	600x500x420
<b>Softcooker S - 1/1 GN</b>	1700	230V/50Hz	24 + 99	26,5	22	565	360	300	16	600x500x420
<b>Softcooker SR - 1/1 GN</b>	1700	230V/50Hz	24 + 99	29	25	575	370	300	16,5	600x500x420

Potenza Potencia Мощность 功率	Alimentazione Alimentación Электропитание 電源	Temperatura Temperatura Temperatur Températur	Capacità vasca Bow capacity Becken Kapazität Capacité cuve	Capienza utile vasca Bowl filling level Becken Nutzliche Kapazität Capacité utile cuve	X	Y	H	Peso netto Net weight Nettogewicht Poids net	Dimensioni imballo Shipping Verpack. abmessungen Dim. embalage
1150	230V/50Hz	24 + 99	16,5	14	390	360	300	5	600x500x420
1150	230V/50Hz	24 + 99	19	17	400	370	300	5,5	600x500x420
1700	230V/50Hz	24 + 99	26,5	22	565	360	300	16	600x500x420
1700	230V/50Hz	24 + 99	29	25	575	370	300	16,5	600x500x420

**SOFTCOOKER SR 2/3 GN****SOFTCOOKER SR 1/1 GN**